

10/597447

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number  
**WO 2005/070801 A1**

(51) International Patent Classification<sup>7</sup>: **B65H 75/14**,  
75/22, H02G 11/02

(21) International Application Number:  
PCT/NO2005/000029

(22) International Filing Date: 25 January 2005 (25.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20040340 26 January 2004 (26.01.2004) NO

(71) Applicant and

(72) Inventor: ØRNSKAR, Gunnar Anton [NO/NO];  
Bondlibråten 59, N-1387 Asker (NO).


(74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M,  
N-0306 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A CABLING SPOOL AND A METHOD FOR SPOOLING, COILING AND STORING OF A CABLE

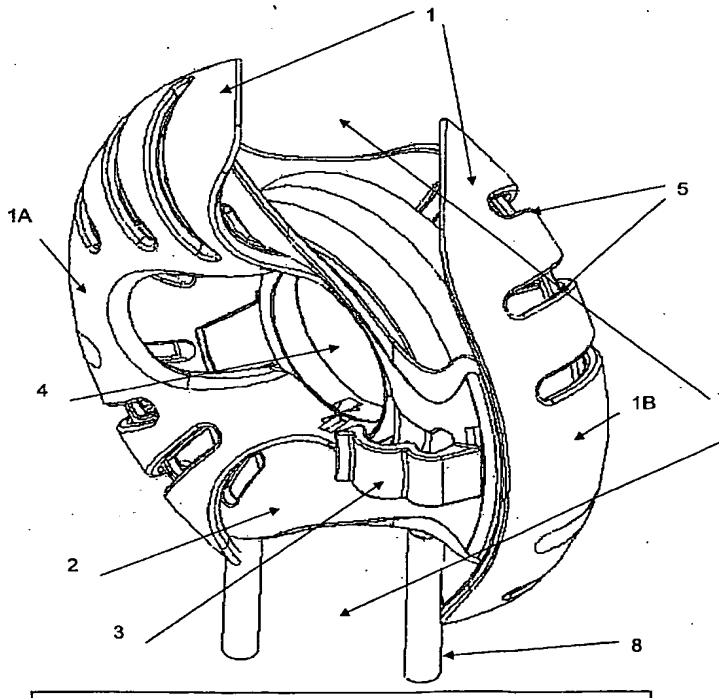

(57) Abstract: A cabling spool and a method for using a cabling spool (1, 2) with integrated spool lids (1). The cabling spool (1, 2) form the inner half of a hollow torus in which the cable may be spooled. The centre of the torus, i.e. the cylindrical core of the spool, comprises two axles. The cabling spool further comprises a external cabling lock (14) attached to the side edge of the cabling spool. The spool lid (1) is a hollow torus arranged on the outside of the ideal torus of the spool (1, 2), with slots (2, 6) in the surface of the torus to allow access to the spool and to open for movement of the spool around the spool grips spolefestene (3, 7) to provide an opening and locking function of the lid.

WO 2005/070801 A1



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*